


- Sealed body
- Integrated coolant flush
- Chip guard with coolant nozzles
- Stroke control unit or proximity switch for end position open

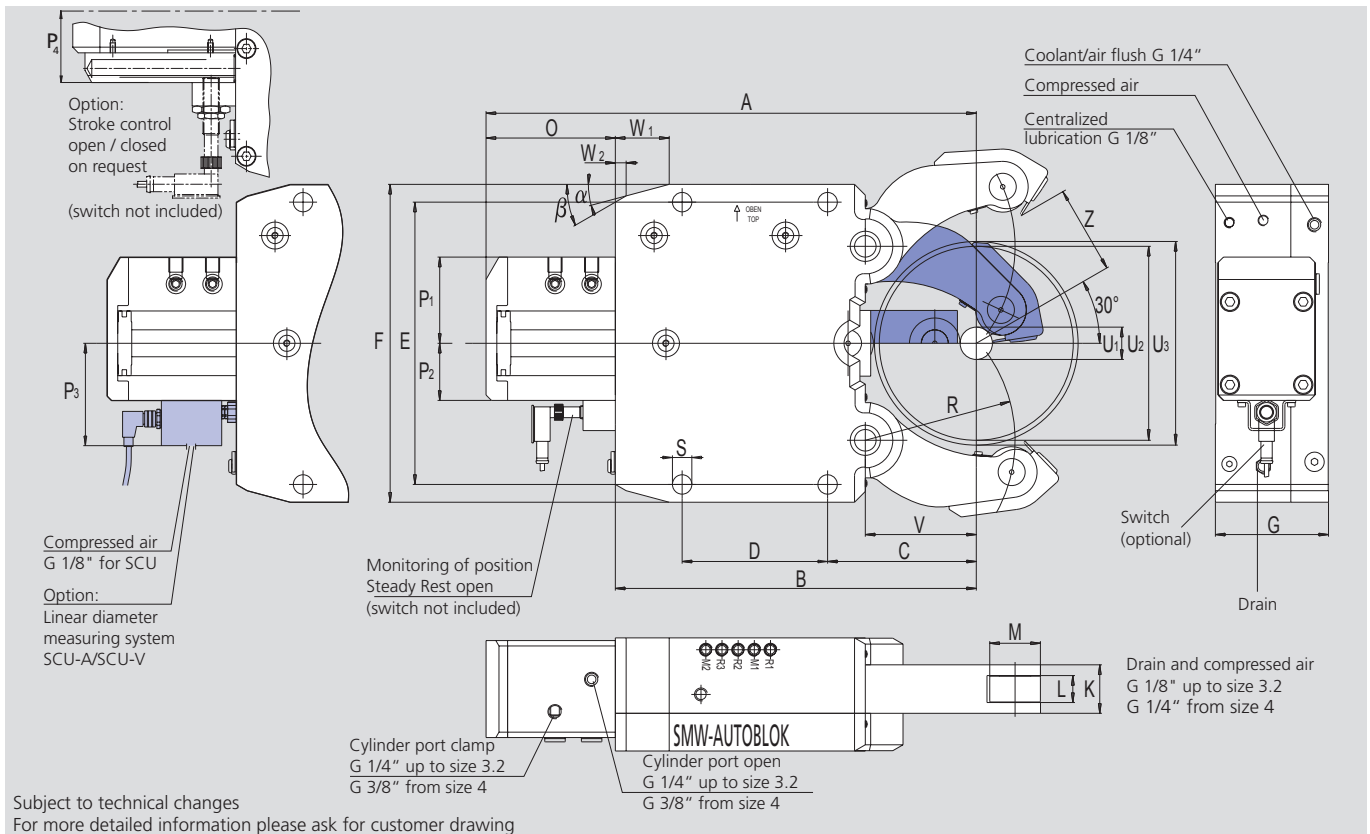

Subject to technical changes

For more detailed information please ask for customer drawing

SMW-AUTOBLOK Type		SR A	SR A	SR A	SRA	SRA	SRA
Size		2	3	3.1	4	5	6
Centering range with coolant chip guard	U1	20 (8*)	28 (12*)	25 (22*)	30	45	175
	U2	80	130	150	220	268	460
Max. axial clearing dia.	Z	35	58	68	103	121	215**
	U3	99	162	168	253	295	466
	A	277	428	436	603	697	953.5
	B	195	312	320	448	510	715
	C	70	115	123	146	178	215
	D	85	135	135	240	270	330
	E	170	262	262	365	400	680
	F	195	295	295	405	440	610/640
	G	75	105	105	125	150	175
	K	35	45	45	60	75	85
Width of rollers	L	19	25	25	25	29	32
Dia. of rollers	M	35	47	47	52	62	90
	O	82	116	116	155	187	238.5
	P1	63	85	85	91	97	122
	P2	40	53	53	61	63	88
	P3	89	102	102	110	112	137
	P4	61	74	74	82	84	109
	R	74	119	124	172	209	290
	S	14	18	18	23	23	27
	V	51	85	93	128	160	190
	W1	30	50	50	58	62	100
	W2	11.2	10	10	18.3	19.1	22
	α	15°	15°	15°	15°	18°	10°
	β	30°	30°	30°	40°	40°	50°
Piston area***	cm ²	19.6	38.5	38.5	63.6	78.5	176.7
Operating pressure min./max.	bar	70	80	80	70	80	75
max. clamping force/roller	daN	450	1000	1000	1500	2000	4500
Centering accuracy within the whole range	mm	0.02	0.04	0.04	0.05	0.06	0.06
Repeatability accuracy	mm	0.005	0.007	0.007	0.007	0.01	0.01
Max. roller surface speed	m/min	800	725	725	715	600	560
Weight approx.	kg	14	56	57	117	174	436

* The Steady Rest can be modified to this clamping range if the coolant chip guard is not used

** SR-A 6: Loading diameter only under 19° installation

*** Cylinder sizes different from standard available on request

- Ordering review
- Accessories and wearing parts

SRA Steady Rest with stroke control Steady Rest open via proximity switch (without proximity switch)***

Steady Rest size		2	3	3.1	4	5	6
SRA-M manual lubrication	Id. No.	128163	128175	128193	127025	128025	128457
SRA-Z central lubrication oil	Id. No.	128164	128176	128194	127024	128024	128456
SRA-OLD central lubrication oil + air	Id. No.	128165	128177	128195	127026	128026	128458
SRA-F central grease lubrication	Id. No.	on request	on request	on request	on request	on request	on request

SRA Steady Rest with stroke control via linear stroke control SCU-A, output 4–20 mA

Steady Rest size		2	3	3.1	4	5	6
SRA-M manual lubrication	Id. No.	on request	128178	128196	127031	128031	128467
SRA-Z central lubrication oil	Id. No.	on request	128179	128197	127030	128030	128468
SRA-OLD central lubrication oil + air	Id. No.	on request	128180	128198	127032	128032	128469
SRA-F central grease lubrication	Id. No.	on request	on request	on request	on request	on request	on request

SRA Steady Rest with stroke control via linear stroke control SCU-V, output 1–10 V

Steady Rest size		2	3	3.1	4	5	6
SRA-M manual lubrication	Id. No.	on request	128181	128199	127034	128035	128471
SRA-Z central lubrication oil	Id. No.	on request	128182	128200	127033	128034	128470
SRA-OLD central lubrication oil + air	Id. No.	on request	128183	128201	127035	128036	128472
SRA-F central grease lubrication	Id. No.	on request	on request	on request	on request	on request	on request

Type SRA

♦ denotes features included in standard range without extra charge

Steady Rest size		2	3	3.1	4	5	6
Fully sealed body		■	■	■	■	■	■
Safety valve		■	■	■	■	■	■
1 set swarf guard with integrated coolant flush		■	■	■	■	■	■
1 set cylindrical rollers		■	■	■	■	■	■
Port for compressed air		■	■	■	■	■	■
Port for coolant through arms incl. chipguard		■	■	■	■	■	■

Type SRA

♦ denotes wearing parts, recommended stock items

Steady Rest size		2	3	3.1	4	5	6
Compact lubrication system for oil pressure lubrication Container 2.7 l, 220 V *, **		088707	088707	088707	088707	088707	088707
Compact lubrication system for oil + air lubrication Container 2.7 l, 220 V *, **		088708	088708	088708	088708	088708	088708
Eccenter fine adjustment compl. at lever arm (2 pcs. per steady rest) manual/central lubrication		127237	127240	127240	128474	128584	128585
Inductive limit switch		087926	087926	087926	087926	087926	087926
Swarf guard coolant/air with wiper		128106	124024	124024	125797	125816	128442
Wiper for swarf guard coolant/air	♦	128108	124026	124026	126904	126888	128444
Swarf guard 3-pcs.	♦	026116	026117	026117	-	-	-
Roller stripper for middle piece	♦	200154	198950	198950	200151	200152	200153
Rollers, cylindrical design	♦	016952	016951	016951	016953	018345	028971
Rollers spherical design for travelling Steady Rest	♦	017658	018433	018433	018443	019545	129825
Adjustment device 1 set = 3 pcs.		-	200178	200178	200179	200179	200179

* When placing an order, please advise voltage

** On request 110 V available

*** Stroke control open / closed on request